


# PRODUCT SPECIFICATION SHEET



Rev. C3


## UFO 13D Downlight

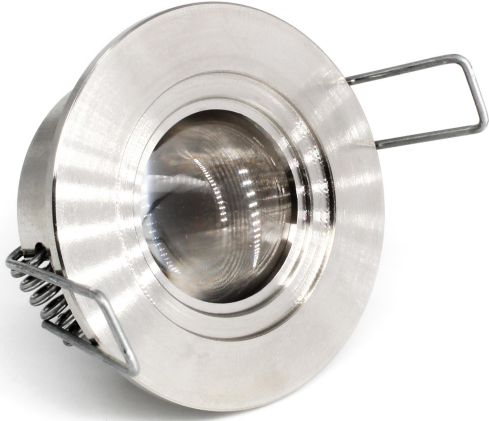

A fixed lens downlight fitting, secured through ceiling with spring clips.

Available in a range of finishes, this fitting allows for the light beam to be focused. The fitting is also suitable for mounting in the base of a display case and illuminating upwards.

Our downlight fittings are suitable for use in a variety of different applications and are the ideal solution for the illumination of static objects within a display case or cabinet.

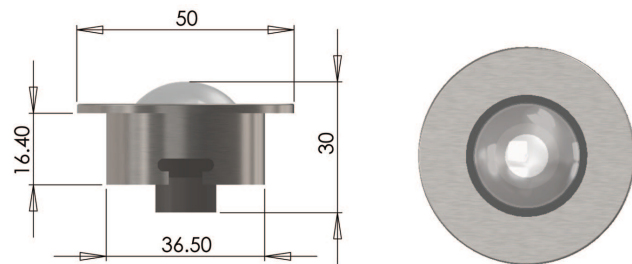

Note that all dimensions are shown in mm

### TECHNICAL INFORMATION

Lens	26mm (1.0") lens
Focus range	20° - 45°
Material	Aluminum, stainless steel or polycarbonate
Finishes available	Aluminum, chrome, black, white, stainless steel
Flange size	ø50 (ø1.96")
Weight	Aluminum; 44.4g (0.1lb) Polycarbonate; 18.8g (0.04lb) Stainless steel; 106.4g (0.23lb)
Mounting hole size	40mm (1.57")
Mounting	Recessed, held by springs
Ferrule size	M10 or 8mm smooth
Min. fiber size	2mm
Max. fiber size	8mm

### ORDERING CODES

MODEL	MATERIAL		FINISH		FERRULE SIZE	
UFO 13D	Aluminum	ALU	Aluminum	ALU	M10	M10
	Stainless Steel	SS	Black	BL	8mm	8mm
	Polycarbonate	PC	White	WH		
			Chrome	CH		
			Stainless Steel	SS		
UFO 13D						



Universal Fibre Optics Ltd  
Home Place \ Coldstream  
TD12 4DT \ UK  
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC  
1749 Northgate Blvd  
Sarasota \ FL34234 \ USA  
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH  
Andreasstraße 20  
93059 Regensburg \ Deutschland  
+49 (0)9491 955880 \ www.ufo-licht.de