


PRODUCT SPECIFICATION SHEET



Rev. C3

LD10 LED Downlight

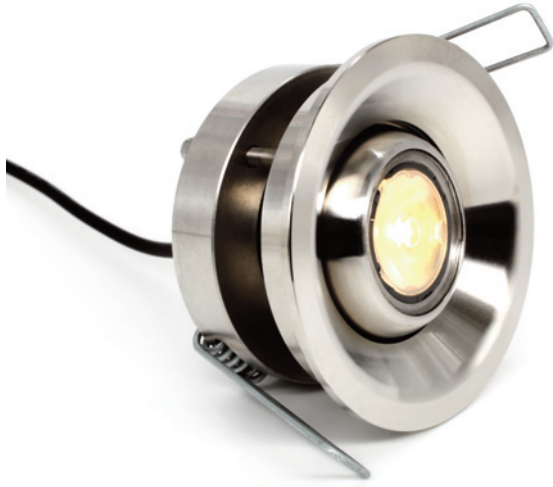


A recessed downlight with a lockable eyeball which is held in place with spring clips. Available in a range of finishes, this fitting can be rotated and tilted to point directly at any objects to be illuminated. Rated to IP66, this fitting is also suitable for use outdoors.

Our downlight fittings are suitable for use in a variety of different applications and are the ideal solution for lighting outdoor areas such as patios and driveways.

GENERAL INFORMATION

Color Temperatures	2700K, 3000K, 4000K & 5700K
Power Consumption	1W per fitting, not inc. driver
Voltage	3.2V nominal
Driver Options	No dimming / 0-10V dimming local dimming / remote dimming
Lens Options	13.5° / 19° / 28°
Lumens per Watt (19° Lens)	67lm/W (2700K) 65lm/W (3000K) 72lm/W (4000K) 89lm/W (5700K)
Material	Stainless steel
Finish	Black, natural stainless steel, custom RAL to order
IP Rating	IP66
Mounting	Spring clip mounting
Articulation	Tilt: 17° (lockable) / Rotation: 360°

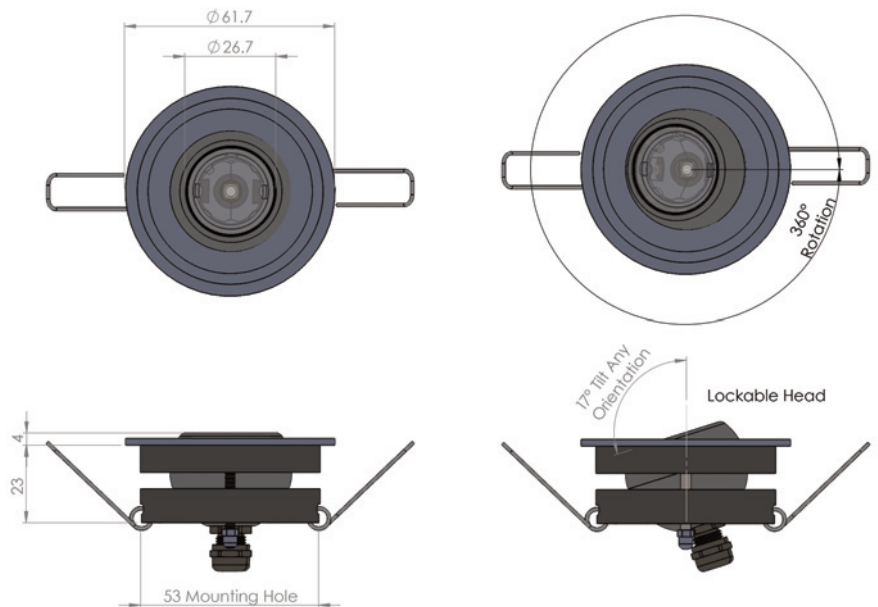

Note that all dimensions are shown in mm

PRODUCT CODES

MODEL	OPTICS		COLOR TEMP		MATERIAL		FLANGE COLOR		EYEBALL COLOR	
UFO LD10	13.5°	13	2700K	27	Stainless Steel	SS	Black	BLF	Black	BLB
	19°	19	3000K	30			Stainless Steel	SSF	Stainless Steel	SSB
	28°	28	4000K	40			Custom	CUF	Custom	CUB
			5700K	57						
UFO LD10										

e.g. UFO LD10-13-40-SS-BLF-BLB



Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de