

PRODUCT SPECIFICATION SHEET



Rev. C2

LD2 LED Downlight




As with all of the downlights in this range, the LD2 uses a Cree LED to provide decorative lighting in indoor environments including residential hallways, kitchens and living rooms as well as several commercial environments.

It features a bezel spanning 48mm in diameter and a recess depth of 35.5mm, making it slightly larger in stature than the LD1. Unlike its counterpart, this aluminum fitting comes with a flush bezel for those requiring an unobtrusive transition between downlight and ceiling.

The LD2 is available with a choice of color temperatures, beam angle options and dimming functionality to provide greater control over your lighting.

It comes with a built in spring mounting system for easy and secure installation in ceilings and other surfaces, and as with all of our LED fittings is available in a range of finishes and colors.

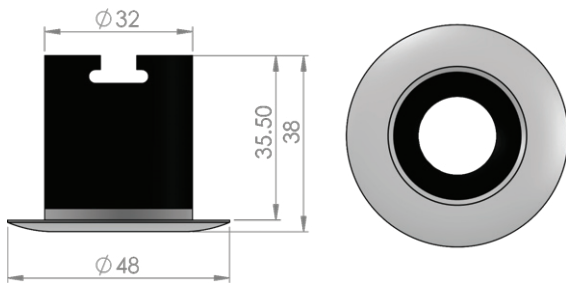

Note that dimensions are shown in mm



TECHNICAL INFORMATION

Illuminator	LED
Operating Environment	Indoor
Material	Aluminum
Finishes	Black, silver, white, custom RAL to order
Securing Method	Secured through surface with spring clips
Power Consumption	1W per fitting
Voltage	3.2V nominal
Color Temp. & CRI	2700K - 98CRI (typical) / 3000K - 98CRI (typical) 4000K - 97CRI (typical) / 5700K - 91CRI (typical)
Typical Luminous Flux (based on 19° lens)	2700K: 61lm/W / 3000K: 65lm/W 4000K: 72lm/W / 5700K: 96lm/W
Optics	13.5° / 19° / 28°

DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

PRODUCT CODES

MODEL	OPTICS		COLOR TEMP		FLANGE COLOR	
UFO LD2	13.5°	13	2700K	27	Black	BL
	19°	19	3000K	30	Silver	SV
	28°	28	4000K	40	White	WH
			5700K	57	Custom	CU

e.g. UFO LD2-13-27-BL

