

PRODUCT SPECIFICATION SHEET



Rev. C2

LD8 LED Downlight




A stylish 50mm cube which is designed to illuminate pillars and walls with glowing light. Fitted with a Cree LED and manufactured from materials which ensure it is suitable for use outdoors as well as in.

The LD8 is available in either a straight or angled version and comes with a choice of color temperatures and narrow or wide optics that allow you to direct the light where it is needed most.

Dimming functionality is also supported using a UFO approved dimmer switch to suit all manner of lighting requirements.

The external cube is manufactured from hard anodised aluminum for added durability and the fitting can be finished in a range of colors to blend in with the surrounding indoor or outdoor environment. The internal parts are manufactured from 316 stainless steel, combined with a brass front flange.

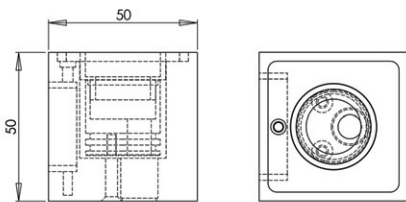

Note that dimensions are shown in mm



TECHNICAL INFORMATION

Illuminator	LED
Operating Environment	Indoor & outdoor
Material	Hard anodised aluminum
Finishes	Black or silver with optional powder coat
Power Consumption	1W per fitting
Voltage	2.75V (min) 3.2V (typical) 3.5V (max)
Color Temp. & CRI	3000K - 96CRI (typical) / 4000K - 95CRI (typical)
Typical Luminous Flux (based on 15° lens)	3000K - 64lm/W / 4000K - 77lm/W
Optics	15° / 51°

DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

PRODUCT CODES

MODEL	OPTICS		COLOR TEMP		FLANGE COLOR	
	Angle	Code	Temp	Code	Color	Code
UFO LD8	15°	15	3000K	30	Black	BL
	51°	51	4000K	40	Silver	SV
					Custom	CU

UFO LD8 - [] - [] - []

e.g, UFO LD8-15-30-BL



Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticlighing.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de