

PRODUCT SPECIFICATION SHEET



Rev. C2


LD9 LED Downlight



An adjustable, recessed LED downlight fitting with choice of color temperatures and optics.

The UFO LD9, which can tilt up to 65°, comes with a choice of narrow, medium and wide beam options to allow you to direct the light exactly where it is needed. Fitted with springs to allow easy installation into the mounting surface.

Available in a range of color temperatures with a high color rendition and multiple methods of dimming, the aluminum fitting is ideally suited for indoor use in residential and architectural sectors amongst others.

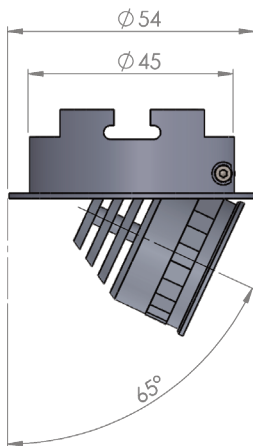

Note that all dimensions are in mm



TECHNICAL INFORMATION

Illuminator	LED
Operating Environment	Indoor
Material	Aluminum
Finishes	Black, silver, white, custom RAL to order
Mounting Method	Secured through back with mounting clips
Power Consumption	1W per fitting
Voltage	3.2V
Color Temp. & CRI	2700K - 97CRI (typical) / 3000K - 98CRI (typical) 4000K - 96CRI (typical) / 5700K - 89CRI (typical)
Typical Luminous Flux (based on 19° lens)	2700K: 67lm/W / 3000K: 65lm/W 4000K: 72lm/W / 5700K: 89lm/W
Optics	13.5° / 19° / 28°
Articulation	Tilt: 65°

DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

PRODUCT CODES

MODEL	OPTICS		COLOR TEMP		FLANGE COLOR		BODY COLOR	
UFO LD9	13.5°	16	2700K	27	Black	BLF	Black	BLB
	19°	23	3000K	30	Silver	SVF	Silver	SVB
	28°	36	4000K	40	White	WHF	White	WHB
	61°	61	5700K	57	Custom	CUF	Custom	CUB
UFO LD9								

e.g. UFO LD9-13-27-BLF-BLB

