

# PRODUCT SPECIFICATION SHEET



Rev. C3


## LP6 LED Paver



Small LED paver fitting. Available in either stainless steel or hard anodised aluminum.

With an extended barrel measuring 47mm in length, the LP6 is the ideal fitting for applications where a deep recess exists.

It comes with an internal lens for reduced glare, and can be specified with a warm white or neutral white LED light and a choice of optics for a greater spread of light. Dimming functionality is also supported with a UFO approved dimmer module.

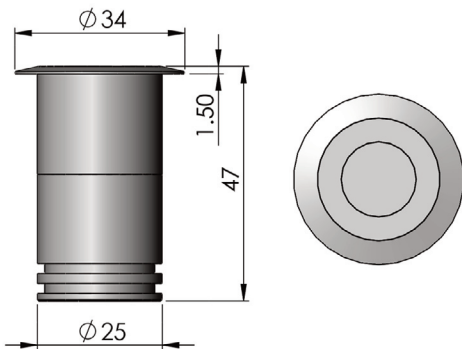

Note that all dimensions are displayed in mm



### TECHNICAL INFORMATION

Illuminator	LED
Operating Environment	Outdoor
Material	Stainless steel or hard anodised aluminum
Finishes	Black, silver, custom RAL to order
Mounting Hole Size	29mm (1.15")
Power Consumption	1W per fitting
Voltage	3.2V nominal
Color Temp. & CRI	3000K - 96CRI (typical) / 4000K - 97CRI (typical)
Typical Luminous Flux (based on 15° lens)	3000K: 47lm/W / 4000K: 53lm/W
Lens Options	15° / 51°

### DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

### PRODUCT CODES

MODEL	OPTICS	COLOR TEMP	MATERIAL	FINISH
UFO LP5	15° 15	3000K 30	Stainless Steel SS	Black BL
	51° 51	4000K 40	Hard Anodised HA	Silver SV
				No color NC
				Custom CU

UFO LP5

e.g. UFO LP6-15-30-SS-BL



Universal Fibre Optics Ltd  
Home Place \ Coldstream  
TD12 4DT \ UK  
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC  
1749 Northgate Blvd  
Sarasota \ FL34234 \ USA  
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH  
Andreasstraße 20  
93059 Regensburg \ Deutschland  
+49 (0)9491 955880 \ www.ufo-licht.de