

PRODUCT SPECIFICATION SHEET



Rev. C4

LPV2 LED Downlight

Surface mount LED downlight fitting with stalk. Features free rotation and tilt. Stalk can be configured as 20mm length as standard and we can also supply custom lengths if required.

The UFO LPV2 fitting features a sleek design and 360° rotation with 90° + 45° articulation in the pivot. Available in a choice of color temperatures with high color rendition and a selection of optics, the fitting can be used to provide contemporary, functional lighting in any environment. The fitting has an inbuilt plug/socket and can be easily removed from its stalk.



TECHNICAL INFORMATION

Color Temperatures	2700K, 3000K, 4000K
Typical CRI Values	>96CRI (3000K) >95CRI (2700K & 4000K)
Power Consumption	1.6W per fitting
Voltage	3.2V nominal @ 500mA
Lumens per Watt	2700K: 75lm/W - 3000K: 77lm/W 4000K: 80lm/W
Lens Options	16° / 23° / 36° / 61°
Material	Aluminum
Finishes	Black or silver
Articulation	Tilt: 90° + 45° / Rotation: 360°



DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

PRODUCT ORDERING CODES

MODEL	OPTICS	COLOR TEMP	FLANGE COLOR	LENGTH
UFO LPV2	16° 16	2700K 27	Black BL	20cm 20
	23° 23	3000K 30	Silver SV	Custom CU
	36° 36	4000K 40		
	61° 61			

UFO LPV2
e.g. UFO LPV2-16-30-BL-20

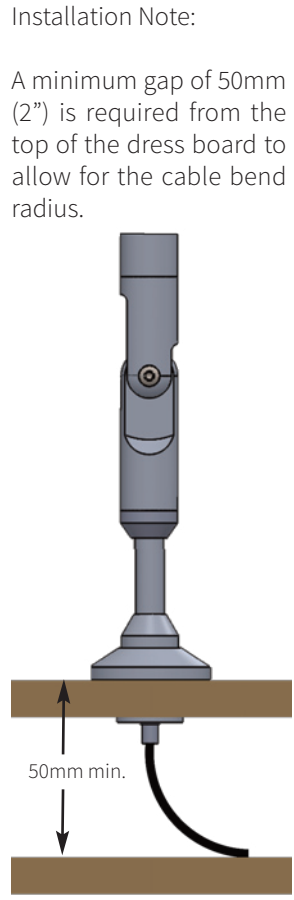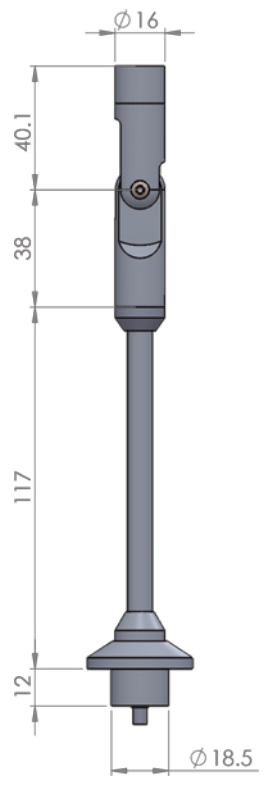

Installation Note:

A minimum gap of 50mm (2") is required from the top of the dress board to allow for the cable bend radius.

Note that all dimensions are shown in mm



Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de