

# PRODUCT SPECIFICATION SHEET



Rev. C1

## UFO P14 Paver



Our range of classic paver fittings are all manufactured from hard wearing, corrosion resistant 316 stainless steel, and fitted with high quality toughened glass.

Available in a wide range of sizes, paver fittings can generally be used with fibre sizes ranging from 2mm up to 8mm diameter. This is dependant on the size of ferrule the fitting can accept.

All pavers are supplied in natural stainless steel and are most types are available with a choice of clear or frosted glass.



The P14 is a medium walkover paver with a 47mm (1.85") square flange and a total depth of 37mm (1.46"). Fitted with a 25mm (0.98") square toughened glass front which can be supplied in either clear or frosted versions.

### TECHNICAL INFORMATION

Lens	25mm (0.98") square, clear or frosted
Beam angle	60°
Material	316 Stainless steel
Finishes available	Stainless steel
Weight	222.4g (0.49lb)
Mounting hole size	38mm (1.5")
Ferrule size	M10 or 8mm smooth
Min. fiber size	2mm
Max. fiber size	8mm

### ORDERING CODES

MODEL	LENS		FERRULE SIZE	
UFO P14	Clear	C	M10	M10
	Frosted	F	8mm	8mm
UFO P14				

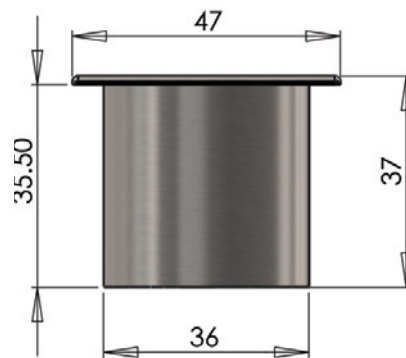

Note that dimensions are shown in mm



Universal Fibre Optics Ltd  
Home Place \ Coldstream  
TD12 4DT \ UK  
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC  
1749 Northgate Blvd  
Sarasota \ FL34234 \ USA  
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH  
Andreasstraße 20  
93059 Regensburg \ Deutschland  
+49 (0)9491 955880 \ www.ufo-licht.de