

PRODUCT SPECIFICATION SHEET

UFO P18 Paver



Rev. C1



Our range of classic paver fittings are all manufactured from hard wearing, corrosion resistant 316 stainless steel, and fitted with high quality toughened glass.

Available in a wide range of sizes, paver fittings can generally be used with fiber sizes ranging from 2mm up to 8mm diameter. This is dependant on the size of ferrule the fitting can accept.

All pavers are supplied in natural stainless steel and most types are available with a choice of clear or frosted glass.

The P18 is a large walkover paver with a 90mm (3.54") round, ribbed flange and a total depth of 46mm (1.81"). Fitted with a 50mm (1.97") diameter toughened glass front which can be supplied in either clear or frosted versions.


Please note: this fitting is made to order only. Delivery will be subject to an extended lead time and price will be dependant on the quantity ordered.

TECHNICAL INFORMATION

Lens	50mm (1.97"), clear or frosted
Beam angle	70°
Material	316 Stainless steel
Finishes available	Stainless steel
Weight	762.1g (1.68lb)
Mounting hole size	54mm (2.13")
Ferrule size	M10 or 8mm
Min. fiber size	2mm
Max. fiber size	8mm

ORDERING CODES

MODEL	LENS		FERRULE SIZE	
UFO P18	Clear	C	M10	M10
	Frosted	F	8mm	8mm
UFO P18				

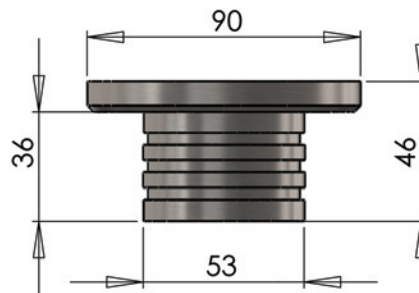

Note that dimensions are shown in mm



Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticlighting.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de